

# CAIZER F60A



**High Quality, Affordable Price**

## **6000kg SWL** **Platform Length : 6,000mm**

The hydraulic cylinder is located inside the platform thus perfectly protected.

High-resistant, galvanised and pre-stretched metal cables.

Large-diameter pulleys with self-lubricating and maintenance-free bushes.


Adjustable parking ratchet rails ensure that the platforms and cross members are horizontal within 4-wheel alignment tolerances.

Automatic spring-loaded safety hook system in the event of cable breakage also ensures complete stability during parking.







**15,000 CYCLE TESTED**

F60A Alignment Platforms

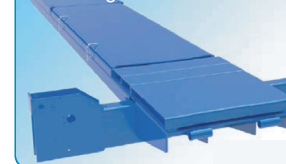



## DRAWING: F60A

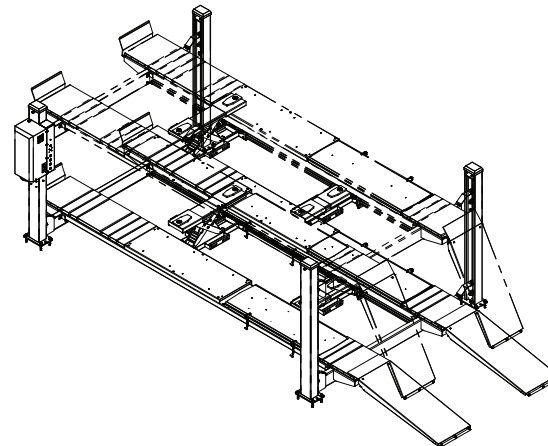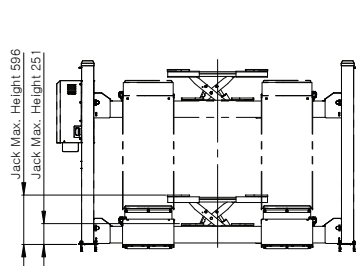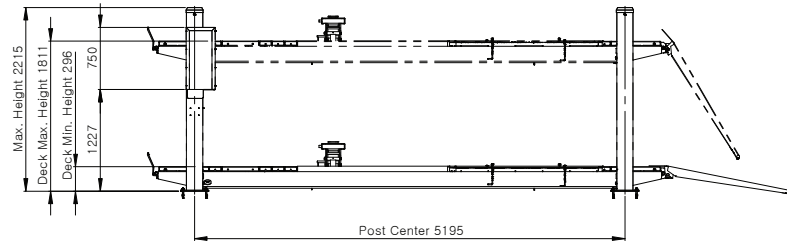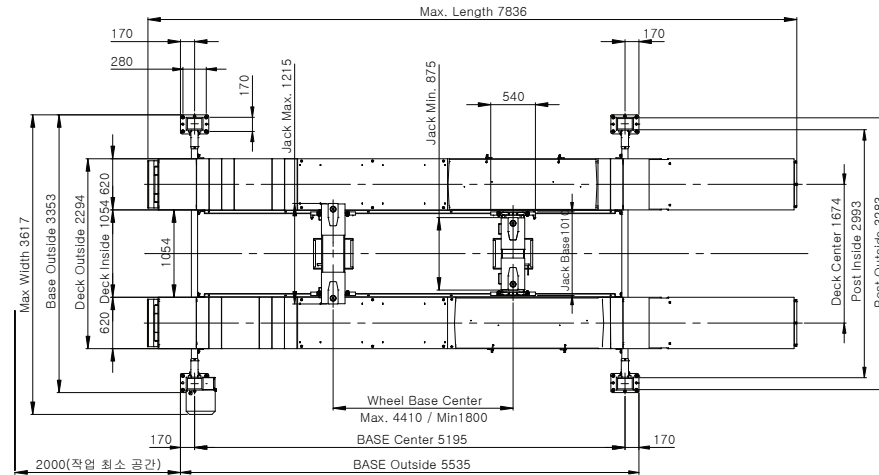

## CAIZER 4 POST HOISTS F60A

Lifting Capacity : MAIN	6,000 Kg
JACK (Option)	3,000Kg
Max. Height : MAIN	1,811 mm
JACK(Option)	596 mm
Min.Height : MAIN	396 mm
JACK(Option)	251 mm
Stroke : MAIN	1,515 mm
JACK(Option)	344 mm
Overall DIM	2,215 (mm) Main Plate; Out-Width x In-Width x Length : 2,254 x 1,054 x 6,076 (mm)
Ascending Time : Main	Approx. 40 ~ 60 sec
Jack	5 ~ 15 sec
Descending Time : Main	Approx. 45 ~ 60 sec
Jack	5 ~ 15 sec
Elec & Motor	3PH : 3HP x 4P x 220V / 380V x 50/60Hz
Control	Control Panel (Push Button)
Net Weight	About 2160 Kg
Jack (Option)	120Kg /1EA
TOTAL	Approx. 2400Kg



sales@caizer.com.au



(02) 4255 7888



CAIZER.COM.AU